



## SLEEVE ANCHORS

HEX HEAD STEEL YELLOW PASSIVATED



CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	MINIMUM EMBEDMENT DEPTH MM	FASTENS MATERIALS UP TO MM	ICCONS CODE
HS6525	6.5 X 25mm	100	6.5	20	5	SA06525
HS6535	6.5 X 35mm	100		30	5	SA06535
HS6555	6.5 X 55mm	100		30	25	SA06555
HS6575	6.5 X 75mm	100		30	45	SA06575
HS0840	8.0 X 40mm	100	8	35	5	SA08040
HS0865	8.0 X 65mm	50		35	30	SA08065
HS0885	8.0 X 85mm	50		35	50	SA08085
HS1040	10 X 40mm	50	10	34	6	SA10040
HS1050	10 X 50mm	50		40	10	SA10050
HS1060	10 X 60mm	50		40	20	SA10060
HS1075	10 X 75mm	50		40	35	SA10075
HS1095	10 X 95mm	50		40	55	SA10095
HS10120	10 X 120mm	50		40	80	SA10120
HS1260	12 X 60mm	50	12	50	10	SA12060
HS1275	12 X 75mm	25		50	25	SA12075
HS12100	12 X 100mm	25		50	50	SA12100
HS12130	12 X 130mm	25		50	80	SA12130
HS1665	16 X 65mm	25	16	55	10	SA16065
HS16110	16 X 110mm	10		55	55	SA16110
HS16145	16 X 145mm	10		55	90	SA16145
HS2075	20 X 75mm	10	20	60	15	SA20075
HS20105	20 X 105mm	10		60	45	SA20105
HS20150	20 X 150mm	10		60	90	SA20150

## SLEEVE ANCHORS

HEX HEAD 316 STAINLESS STEEL



HS1050SS	10 X 50mm	50	10	40	10	SA10050SS
HS1060SS	10 X 60mm	50		40	20	SA10060SS
HS1075SS	10 X 75mm	50		40	35	SA10075SS
HS1260SS	12 X 60mm	50	12	50	10	SA12060SS
HS1275SS	12 X 75mm	25		50	25	SA12075SS

## FLUSH HEAD SLEEVE ANCHORS

Carbon Steel Yellow Passivated



FHS1055	10 X 55mm	50	10	40	15	SAF10055
FHS1065	10 X 65mm	50	10	40	25	SAF10065
FHS1265	12 X 65mm	50	12	50	15	SAF12065
FHS1675	16 X 75mm	25	16	60	15	SAF16075

## SLEEVE ANCHORS


COUNTERSUNK (Flush Head) Steel Yellow Passivated



FS6535	6.5 X 35mm	100	6.5	30	5	SACSK065035
FS6555	6.5 X 55mm	100		30	25	SACSK065055
FS6575	6.5 X 75mm	100		30	45	SACSK065075
FS0860	8 X 60mm	50	8	35	25	SACSK08060
FS0885	8 X 85mm	50		35	50	SACSK08085
FS1075	10 X 75mm	50	10	40	35	SACSK10075
FS10100	10 X 100mm	50		40	60	SACSK10100

## THRU-BOLT STUD ANCHOR

CARBON STEEL CLASS 5.8 ZINC CLEAR

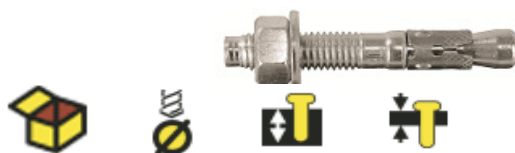

CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	MINIMUM EMBEDMENT DEPTH MM	FASTENS MATERIALS UP TO MM	ICCONS CODE
PTB12100	12 X 100mm	25	12	60	25	TB12100
PTB16105	16 X 105mm	25	16	80	5	TB16105
PTB16125	16 X 125mm	25		100	10	TB16125
PTB20160	20 X 160mm	10	20	120	20	TB20160

\*Other sizes available

## THRU-BOLT STUD ANCHOR

CARBON STEEL CLASS 5.8 GALVANISED



PTB12100	12 X 100mm	25	12	60	25	TB12100G
PTB16105	16 X 105mm	25	16	80	5	TB16105G
PTB16125	16 X 125mm	25		100	10	TB16125G
PTB20160	20 X 160mm	10	20	120	20	TB20160G

\*Other sizes available

## CHISEL POINT STUDS

WITH NUT AND WASHER zinc passivated



CODE	DESCRIPTION	DRILL DIA MM	MIN DEPTH	FIXTURE THICKNESS	ICCON CODE
STM8110	8mm x 110mm	10	80mm	17	CPS08110
STM10130	10mm x 130mm	12	90mm	28	CPS10130
STM12160	12mm x 160mm	14	110mm	36	CPS12160
STM16190	16mm x 190mm	18	125mm	42	CPS16190
STM20260	20mm x 260mm	24	170mm	72	CPS20260
STM24300	24mm x 300mm	28	210mm	66	CPS24300

## CHISEL POINT STUDS

WITH NUT AND WASHER galvanised



STM8110G	8mm x 110mm	10	80mm	17	CPS08110G
STM10130G	10mm x 130mm	12	90mm	28	CPS10130G
STM12160G	12mm x 160mm	14	110mm	36	CPS12160G
STM16190G	16mm x 190mm	18	125mm	42	CPS16190G
STM20260G	20mm x 260mm	24	170mm	72	CPS20260G
STM24300G	24mm x 300mm	28	210mm	66	CPS24300G

## BIS-P STYRENE FREE INJECTION SYSTEM

BIS-P420	Styrene Free Injection System 420ml cartridge with 2 nozzles	1
----------	---	---

CDISP-VP	Dispensing tool for BIS-P420 Only	1
----------	--------------------------------------	---

BIS-P300	300ml Styrene Free Injection System to suit standard caulking gun	1
----------	--	---





## WEDGE ANCHOR (DROP-INS)



CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	MINIMUM EMBEDMENT DEPTH MM	ICCONS CODE
D6M	M6 X 25mm	100	8	27	DM06
D8M	M8 X 30mm	100	10	32	DM08
D10M	M10 X 40mm	50	12	42	DM10
D12M	M12 X 50mm	50	15	52	DM12
D16M	M16 X 65mm	25	20	67	DM16
D20M	M20 X 80mm	25	25	82	DM20

## WEDGE ANCHOR (DROP-INS)

### SETTING TOOLS



ST6-1/4	To suit M6 & 1/4"	EA	DST06
ST8-5/16	To suit M8 & 5/16"	EA	DST08
ST10-3/8	To suit M10 & 3/8"	EA	DST10
ST12-1/2	To suit M12 & 1/2"	EA	DST12

## LIPPED DROP-INS AND SETTING TOOL



LPD10M	M10 X 30mm	50	12	30	DLPM1030
LDST10	10mm Setting Tool Soft Grip	EA			DLST1030

## M10 LIPPED DROP-INS IN A BUCKET

LPD10M-BUCKET	500
500 M10 Drop-ins, 2 Drill Bits, Soft Grip Setting Tool	



DLPM1030BK-SDS

## HANGERZ FOR CONCRETE

HZCVM10	M10 X 40mm	100
HZCVM10-BUCKET, 3 Drill Bits, 1 Socket & 1 Sleeve	500	
HZCM10-D	M10 Socket Driver	EA
HZ6MD-D	Driver Adaptor	EA
HZ6MD	SDS Drill 6mm x 150mm	EA



## HANGERZ FOR STEEL

HZSVM10	M10 Rod Hanger for Steel substrates	EA
HZSM10D	M10 Socket Driver	EA



## THUNDERBOLT PRO HEX HEAD

CARBON STEEL YELLOW PASSIVATED



CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	SPANNER MM	FASTENS MATERIALS UP TO MM
BT6530	6.5 X 30mm	100	6.5	10	5
BT6550	6.5 X 50mm	100			25
BT6575	6.5 X 75mm	50			50
BT65100	6.5 X 100mm	50			75
SXTB08050	8 X 50mm	100	8	13	10
SXTB08060	8 X 60mm	100			20
SXTB08075	8 X 75mm	100			35
SXTB08100	8 X 100mm	100			60
SXTB10060	10 X 60mm	50	10	17	10
SXTB10075	10 X 75mm	50			25
SXTB10100	10 X 100mm	50			50
SXTB10120	10 X 120mm	50			70
SXTB12075	12 X 75mm	50	12	19	15
SXTB12100	12 X 100mm	50			40
SXTB12120	12 X 120mm	25			60
SXTB12150	12 X 150mm	25			90
SXTB16100	16 X 100mm	15	16	24	20
SXTB16150	16 X 150mm	15			70

## THUNDERBOLT PRO HEX HEAD

CARBON STEEL MECHANICALLY GALVANISED



BTG6530	6.5 X 30mm	100	6.5	10	5
BTG6550	6.5 X 50mm	100			25
BTG6575	6.5 X 75mm	50			50
BTG65100	6.5 X 100mm	50			75
SXTB08050G	8 X 50mm	100	8	13	10
SXTB08060G	8 X 60mm	100			20
SXTB08075G	8 X 75mm	100			35
SXTB08100G	8 X 100mm	100			60
SXTB10060G	10 X 60mm	50	10	17	10
SXTB10075G	10 X 75mm	50			25
SXTB10100G	10 X 100mm	50			50
SXTB10120G	10 X 120mm	50			70
SXTB12075G	12 X 75mm	50	12	19	15
SXTB12100G	12 X 100mm	50			40
SXTB12150G	12 X 150mm	25			90
SXTB16100G	16 X 100mm	15	16	24	20
SXTB16150G	16 X 150mm	15			70

## THUNDERBOLT PRO CSK HEAD

COUNTERSUNK HEAD CARBON STEEL YELLOW PASSIVATED



SXTBCS06050G	6.0X50mm	100	6	5 INT HEX	25
SXTBCS08060G	8.0X60mm	100	8	6 INT HEX	15
SXBTCs10060G	10X60mm	100	10	8 INT HEX	20
SXTBCS10100G	10X100mm	50			60
SXTBCS12075G	12X75mm	50	12	10 INT HEX	25
SXTBCS12100G	12X100mm	50			50



## HOLLOW WALL ANCHORS



CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	ICCONS CODE	FASTENS MATERIALS UP TO MM
HWA4XS	8mm x 20mm with M4 screw	100	8	HA4XS	0 to 5
HWA4S	8mm x 32mm with M4 screw	100		HA4S	5 to 10
HWA4SL	8mm x 46mm with M4 screw	100		HA4SL	10 to 18
HWA4L	8mm x 46mm with M4 screw	100		HA4L	18 to 24
HWA6S	10mm x 52mm with M6 screw	50	10	HA6S	10 to 21
HWA8S	11mm x 52mm with M8 screw	50	11	HA8S	10 to 21

## HOLLOW WALL ANCHOR SETTING TOOLS

HWAST-200	HEAVY DUTY	EA	HA-STHD
-----------	------------	----	---------



## SPRING TOGGLES

ST182	1/8"x2 Round Head	50	10	STR18-2	30
ST3162	3/16"x2 Round Head	50	13	STR316-2	25
ST3163	3/16"x3 Round Head	50		STR316-3	48
ST3164	3/16"x4 Round Head	50		STR316-4	74
STCH3163	3/16"x3 Cup Hook	50		STRCH316-3	50



## METAL PIN ANCHORS

### MUSHROOM HEAD

MPA0522	5 X 22mm	100	5	MP05022	6.5
MPA6520	6.5 X 20mm	100	6.5	MP65020	6.5
MPA6525	6.5 X 25mm	100		MP65025	10
MPA6532	6.5 X 32mm	100		MP65032	17
MPA6538	6.5 X 38mm	100		MP65038	23
MPA6550	6.5 X 50mm	100		MP65050	35



## GRIP NUT

GNM515	5 x 15mm	200	10	5
GNM525	5 x 25mm	100		16
GNM540	5 x 40mm	50		30



## GRABCON HEX & COUNTERSUNK HEAD

CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	MINIMUM EMBEDMENT DEPTH MM	FASTENS MATERIALS UP TO MM
GCCSK05070	5X70MM (3/16X2-3/4) CSK	100	*5/32	25	5
GCHX65032	6.5X32MM (1/4X1-1/4")HEX	100	*3/16	25	6.5
GCHX65083	6.5X83MM (1/4X3-1/4")HEX	100		25	57.5



\* Note drill bit included in each box

# Buildex®



## WALL-MATES

CODE	DESCRIPTION	PACK QTY	PACK TYPE	HANGS UP TO	TYPE
------	-------------	----------	-----------	-------------	------

### NYLON

WALLMATEN	Wall-Mate	100	Trade Box	10KGS	Bulk
199600028	Mini Wall-Mate	100	Trade Box	5KGS	Bulk
02391	ZAP-IT Nylon	100	Trade Box		Bulk

### METAL

WALLMATEM	Wall-Mate	100	Trade Box	10KGS	Bulk
199900815	Mini Wall-Mate	100	Trade Box	5KGS	Bulk
02392	ZAP-IT Metal	100	Trade Box		Bulk

## SUSPENSION ANCHORS

Carbon Steel Yellow Passivated



CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	MINIMUM EMBEDMENT DEPTH MM	FASTENS MATERIALS UP TO MM
SASUS06535	Suspension 6.5x35mm	100	6.5	35	
SAEB0845	Eye Bolt 8.0x45mm	100	8	45	
SAHB0845	Hook Bolt 8.0x45mm	100	8		
TWTB06060	Tie Wire 6.0x60mm	100	6	40	

## NYLON ANCHOR

ROUND HEAD Nail-In



CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	ICCON CODE	FASTENS MATERIALS UP TO MM
RN0525	5 X 25mm	100	5	NNR05025	6.5
RN0540	5 X 40mm	100		NNR05040	19
RN6525	6.5 X 25mm	100	6.5	NNR65025	6.5
RN6538	6.5 x 38mm	100		NNR65038	19
RN6550	6.5 X 50mm	100		NNR65050	32

## MUSHROOM HEAD Nail-In



MN0525	5 X 25mm	100	5	NNM05025	6.5
MN6525	6.5 X 25mm	100	6.5	NNM65025	6.5
MN6538	6.5 X 38mm	100		NNM65038	19
MN6550	6.5 X 50mm	100		NNM65050	32
MN6575	6.5 X 75mm	50		NNM65075	50

## DOG-BITES



CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	MINIMUM EMBEDMENT DEPTH MM
WALLDOG32	3.7 X 32MM Pan Phil Screw	100	5	20

## PVC FRAMED WALL PLUGS



CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	ICCON CODE	SCREW DIA
R25	Red 25mm Plug	1000	6	PVCR25	8g/4mm
R30	Red 30mm Plug	1000		PVCR30	
R38	Red 38mm Plug	1000		PVCR38	
R50	Red 50mm Plug	1000		PVCR50	
G25	Green 25mm Plug	1000	7	PVCG25	10g-12g/
G30	Green 30mm Plug	1000		PVCG30	5 - 5.5mm
G38	Green 38mm Plug	500		PVCG38	
B25	Blue 25mm Plug	1000	8	PVCB25	14g/6 - 7mm
B38	Blue 38mm Plug	500		PVCB38	
B50	Blue 50mm Plug	500		PVCB50	

## SCORPION PLUG



SCORPION	Red	600	8.5	7g
----------	-----	-----	-----	----

## NYLON GREY PLUG



NGP0630	6 X 30mm	200	6	3.5 to 4
NGP0840	8 X 40mm	100	8	5 to 6
NGP1050	10 X 50mm	50	10	6 to 7.5
NGP1260	12 X 60mm	25	12	7.5 to 8

## FRIULSIDER NYLON PLUGS



FTU10050	10 X 50mm	50	10	6 to 8
FMXP10065	10 X 65mm	50	10	6

## POLY - TOGGLES



PTP10	Short 10 - 13	100	8	6 to 8g	10 to 13
PTP13	Medium 13 - 16	100	8	6 to 8g	13 to 16
PTP16	Long 16 - 20	100	8	6 to 8g	16 to 20

CODE	DESCRIPTION	PACK SIZE	DRILL DIA MM	SCREW DIA
------	-------------	-----------	--------------	-----------

## PLASTIC SPAGHETTI

G550	M5 x 50MTR Green	EA	5.5	3 to 3.5
R5550	M5.5 X 50MTR Red	EA	6	3.5 to 4
R5505RP	M5.5 X 5MTR Red	EA	6	3.5 to 4



## FOX FOR FASTENING TO FOAM INSULATED PANELS TORX T40 RECESS



CODE	DESCRIPTION	PACK QTY	MIN INSERTION OF SCREW	SCREW DIA
STYROMATE50	50mm Foam Fastening Plug	50	30mm	10g
STYROMATE85	85mm Foam Fastening Plug	25	40mm	10g


## STYROWEDGE - For Fixing to Foam Wallboards.

STYROWEDGE	50
------------	----

Styrowedge gives plumbers, electricians and security services a solution to fixing objects to foam wallboards, can hold up to 20kg.

### Installation


1. Take a styrowedge fastener (2 pieces)
2. Using a stanley knife cut a horizontal slot approximately the same width as the styrowedge into the wall
3. Insert styrowedge until flush with (can be done by knocking styrowedge with hammer)
4. Use at least a 40mm screw between 8-12 gauge to fasten between the two styrowedge plates



## NAILS FOR PNEUMATIC FRAMING TOOL

CODE	DESCRIPTION	CTN QTY
------	-------------	---------

NF75B	75MM X 3.05MM Framing Nails Bright	3000
-------	------------------------------------	------




NF75BGAS	75MM X 3.05MM Framing Nails Bright Plus 3 Fuel Cells	3000
----------	---	------



### PASLODE NAILS

NF75PASLODE	75MM X 3.05MM Framing Nails Bright Plus 3 Fuel Cells B20547V	3000
-------------	---	------

NF75PASLODEG	75MM X 3.05MM Framing Nails Hot Dip Gal Plus 3 Fuel Cells B20569V	3000
--------------	--	------





## FOAM FILLER EXPANDING POLYURETHANE



**ICCONS® FOAMFLO®** with CFC-free propellant is a one-component, self expanding, ready-to-use polyurethane foam which is completely harmless to the ozone layer.

**Characteristics:**

- Available in tool or manual straw delivery systems.
- Excellent adhesion on most substrates (except Teflon, PE and PP).
- High thermal and acoustical insulation.
- Very good filling characteristics.
- Excellent mounting capacities.
- Excellent stability (no shrink or post expansion).

**General Applications:**

- Sealing of window and door frames.
- Sealing of all openings in roof constructions.
- Sealing of cable - and pipe penetrations.
- Creation of a sound-proof screen.
- Bonding of insulation materials.
- Application of sound-deadening layers.
- Improving thermal insulation in cold store area's.
- Sealing of air conditioning penetrations.

**Application:**

Shake the aerosol can for at least 20 seconds. For FOAMFLO®F750 fit the supplied adapter on the valve, for FOAMFLO® FT750 fit to dispensing tool (sold separately). Moisten surfaces with a water sprayer prior to application. During application hold can upside down, remove pressure from the applicator/ tool to stop the flow. Fill holes and cavities to 50%, as the foam will expand. Repeat shaking regularly during application. If you have to work in layers repeat moistening after each layer. Fresh foam can be removed using ICCONS® FOAMFLO®CLEANER or acetone. Cured foam can only be removed mechanically. Working temperature 5°C to 35°C. (20°C-25°C recommended).



**ICCONS® FOAMFLO®FIRE** is a single-component, self expanding, ready to use polyurethane foam with propellants which are completely harmless to the ozone layer. It is fire rated up to 360 minutes in specific configurations (refer to test reports).

**Characteristics:**

- Fire resistant up to 360 min - (see table over back)
- Efficient seal against smoke and gas
- Does not contain CFC's and H-CFC's
- Excellent adhesion on most substrates (except Teflon, PE and PP)
- High thermal and acoustical insulation
- High bonding strength
- Very good filling characteristics
- Excellent stability: no shrink or post expansion
- Can be painted after full cure



CODE	DESCRIPTION				
F750	750ML Expanding PU Foam with Straw Nozzle				
FT750	750ML Expanding PU Foam for tool delivery system				
FOAMFLOFIRE	750ML Fire Retardant Expanding PU Foam with Straw Nozzle				
FOAMCLEANER500	500ML Cleaner for PU Foam and Tool				
FT-DISPTOOL	Disposable dispensing tool				
FT-PROTOOL	Professional dispensing tool				



FT-DISPTOOL



FT-PROTOOL