




MULTIGRIP RIVETS

DOME HEAD - ALUMINIUM RIVET, STEEL MANDREL

Material: Body: Aluminium Alloy 5052

Mandrel: Carbon Steel

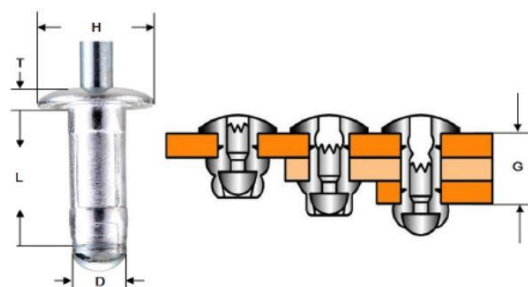

One rivet can be used in multiple material thickness, this reduces inventories and eliminates operator error.

Stem is locked in shell, eliminating the risk of mandrel head vibrating loose while providing a weather resistant joint.

The bulbing formation of the multi-grip rivet will fill slightly oversized holes, providing increased strength and vibration resistance.

RIVET CODE			RIVET DIA D		DRILL SIZE	RIVET L LENGTH MAX MM	GRIP RANGE G	STANDARD STRENGTH N. (nom.)		HEAD DIAMETER H (mm)	HEAD THICKNESS T (mm)Max	BULK QTY	BOX QTY
			INCH	MM				SHEAR	TENSILE				
ALUMINIUM DOME HEAD RIVETS													
ASMG43			1/8	3.2	#30 3.3	8.2	1.0 - 4.8mm	700N	1000N	6.4mm	1.20	20000	1000
ASMG45						11.4	3.2 - 8.0mm					10000	1000
ASMG46						13.0	4.8 - 9.6mm					10000	1000
ASMG54			5/32	4.0	#20 4.1	10.5	1.6 - 6.4mm	1000N	1600N	7.9mm	1.50	10000	1000
ASMG56						13.6	4.8 - 9.6mm					10000	500
ASMG63			3/16	4.8	#11 4.9	11.1	1.6 - 6.4mm	1300N	2100N	9.5mm	1.60	5000	500
ASMG67						15.9	6.4 - 11.2mm					5000	500
ASMG69						19.3	9.6 - 14.3mm					5000	500
ASMG612						23.8	14.3 - 19.1mm					5000	250
ASMG614						27.0	17.6 - 22.3mm					2500	250
ALUMINIUM LARGE FLANGE RIVETS													
ASMG68LF			3/16	4.8	#11 4.9	17.5	8.0 - 12.7mm	1300N	2100N	16.0mm	2.34	2500	250
ASMG612LF						23.8	11.2 - 19.1mm					2000	200
ALUMINIUM COUNTERSUNK RIVETS													
ASMG64CSK			3/16	4.8	#11 4.9	11.1	1.6 - 6.4mm	1300N	2100N			5000	500
ASMG67CSK						15.9	6.4 - 11.2mm					5000	500
ALUMINIUM DOME HEAD RIVETS WITH 304 STAINLESS STEEL STEMS													
ASTMG53-55			5/32	4.0	#20 4.1	12.0	1.6 - 6.4mm	1000N	1600N			5000	500
ASTMG53-55SU			Painted shell Surfmist									5000	500
STAINLESS STEEL 304 DOME HEAD RIVETS WITH STAINLESS STEEL STEMS													
STSSMG41-43			1/8	3.2	#30 3.3	9.9	1.0 - 4.8mm	1440N	1980N	6.4mm	1.20	20000	1000
STSSMG44-46						14.6	4.8 - 9.6mm					10000	1000
STSSMG52-54			5/32	4.0	#20 4.1	12.0	1.6 - 6.4mm	2420N	3250N	7.9mm	1.50	10000	1000
STSSMG54-56						15.2	4.8 - 9.6mm					10000	500
STSSMG62-63			3/16	4.8	#11 4.9	11.1	1.6 - 6.4mm	4000N	4490N	9.5mm	1.60	5000	500
STSSMG64-66						15.9	4.8 - 9.6mm					5000	500
STSSMG66-68						19.3	8.0-12.7mm					5000	500
STSSMG69-611						23.8	12.7-17.5mm					5000	250


PRICES \$ PER 1000 BULK AND BOX PACKS



ALUMINIUM RIVETS AS DOME HEAD - ALUMINIUM RIVET, STEEL MANDREL

Material: Body: Aluminium Alloy 5050

Mandrel: Carbon Steel

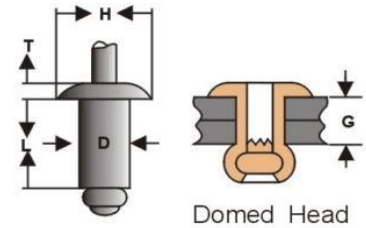


A general purpose rivet used extensively for:-

Roofing, guttering, flyscreen doors, toys, white goods, garden sheds, roller doors, caravans, boats, Electrical appliances, building industry. Can be used as exterior/interior rivet.

RIVET CODE	RIVET DIA D	DRILL SIZE	RIVET L LENGTH	GRIP RANGE	STANDARD STRENGTH		HEAD DIAMETER	HEAD THICKNESS	BULK QTY	BOX QTY
					LBS (min)	TENSILE				
	INCH MM		MAX MM	G	SHEAR	TENSILE	H (mm)	T (mm)Max		
AS3-3	3/32 2.4	2.5	8.0	3.2 - 4.8	70	80	4.3 - 5.0	0.8	20000	1000
AS4-1	1/8 3.2	#30 3.3	5.1	0.8 - 1.6	120	150	5.8 - 6.5	1.2	20000	1000
AS4-2			6.7	1.6 - 3.2					20000	1000
AS4-3			8.2	3.2 - 4.8					20000	1000
AS4-4			9.9	4.8 - 6.4					20000	1000
AS4-5			11.4	6.4 - 7.9					20000	1000
AS4-6			13.0	7.9 - 9.5					20000	1000
AS4-8			16.2	9.5 - 12.7					10000	1000
AS4-10			19.4	12.7 - 15.9					10000	1000
AS4-12			22.2	15.9 - 19.0					10000	500
AS5-2	5/32 4.0	#20 4.1	7.3	1.6 - 3.2	190	230	7.0 - 8.0	1.5	10000	1000
AS5-3			8.9	3.2 - 4.8					10000	1000
AS5-4			10.5	4.8 - 6.4					10000	1000
AS5-5			12.0	6.4 - 7.9					10000	1000
AS5-6			13.6	7.9 - 9.5					10000	1000
AS5-8			16.8	9.5 - 12.7					10000	500
AS5-10			20.0	12.7 - 15.9					10000	500
AS5-12			22.5	15.9 - 19.0					5000	500
AS6-2	3/16 4.8	#11 4.9	8.0	1.6 - 3.2	260	320	8.5 - 9.5	1.6	10000	500
AS6-3			9.5	3.2 - 4.8					10000	500
AS6-4			11.1	4.8 - 6.4					10000	500
AS6-5			12.7	6.4 - 7.9					10000	500
AS6-6			14.3	7.9 - 9.5					5000	500
AS6-8			17.5	11.1 - 12.7					5000	500
AS6-10			20.7	12.7 - 15.9					5000	250
AS6-12			23.8	15.9 - 19.0					5000	250
AS6-14			27.0	19.0 - 22.2					2500	250
AS6-16			30.2	22.2 - 25.4					2500	250
AS6-20			36.5	25.4 - 31.7					1500	150
AS6-22			40.0	30.0 - 35.0					1500	150
AS8-4	1/4 6.4	6.5	12.4	3.2 - 6.4	460	560	11.5 - 13.0	2.2	4000	400
AS8-6			15.5	6.4 - 9.5					3500	350
AS8-8			18.7	9.5 - 12.7					3000	300
AS8-10			21.9	12.7 - 15.9					2500	250
AS8-12			25.1	15.9 - 19.0					2500	250
AS8-16			31.4	22.2 - 25.4					2000	200

PRICES \$ PER 1000 BULK AND BOX PACKS



PAINTED RIVETS

DOMED HEAD - ALUMINIUM RIVET, STEEL MANDREL

RIVET CODE	RIVET DIA D INCH MM	DRILL SIZE	RIVET L LENGTH MAX MM	GRIP RANGE G	STANDARD STRENGTH		HEAD DIAMETER H (mm)	HEAD THICKNESS T (mm)Max	BULK QTY	BOX QTY
					LBS (min)	SHEAR TENSILE				
AS4-3	1/8 3.2	#30 3.3	8.2	3.2 - 4.8	120	150	5.8 - 6.5	1.2	20000	1000
AS4-4			9.9	4.8 - 6.4					20000	1000
AS4-6			13.0	7.9 - 9.5					20000	1000
ASMG56	5/32 4.0	4.2	13.6	4.8 - 9.6	225	360	7.9	1.27	10000	500
ASMG63	3/16 4.8	4.9	11.1	1.6 - 6.4	292	472	9.5	1.60	5000	500
ASMG67			15.9	6.4 - 11.2					5000	500

COLOUR NAME	AS4-3	AS4-4	AS4-6	ASMG56	ASMG63	ASMG67
Basalt™	X			X		
Bronze	X	X				
Classic Cream™	X		X	X		
Cottage Green™	X			X		
Cove™	X			X		
Deep Ocean™	X			X		
Dune®	X			X		
Evening Haze®	X			X		
Gully™	X			X		
Ironstone™	X			X		
Jasper™	X			X		
Manor Red™	X			X		
Mangrove™	X			X		
Monument™	X			X		
Night Sky™	X	X	X	X		X
Pale Eucalypt™	X			X	X	
Paperbark™	X	X	X	X	X	
Pearl White	X					
Shale Grey™	X			X		
Surfmist®	X			X	X	X
Terrain™	X			X		
White	X	X	X	X		X
Wallaby™	X			X		
Windspray®	X			X		
Woodland Grey™	X		X	X		


PRICES \$ PER 1000 BULK AND BOX PACKS



ALUMINIUM RIVETS LARGE FLANGE AS-LF DOME HEAD - ALUMINIUM RIVET, STEEL MANDREL

Material: Body: Aluminium Alloy 5050

Mandrel: Carbon Steel

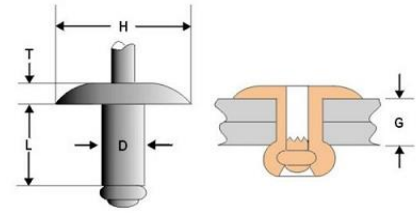


LARGE FLANGE RIVETS provide greater bearing surface for fastening soft and brittle facing materials such as plywood and plastics including neoprene, vinyl, etc.

RIVET CODE	RIVET DIA D INCH MM	DRILL SIZE	RIVET L LENGTH MAX MM	GRIP RANGE G	STANDARD STRENGTH		HEAD DIAMETER H (mm)	HEAD THICKNESS T (mm)	BULK QTY	BOX QTY
					LBS (min) SHEAR	TENSILE				
AS4-2LF	1/8 3.2	#30 3.3	6.7	1.6 - 3.2	120	150	9.6	1.6	10000	1000
AS4-4LF			9.9	4.8 - 6.4					10000	1000
AS4-6LF			13.0	7.9 - 9.5					10000	500
AS5-4LF	5/32 4.0	#20 4.1	10.5	4.8 - 6.4	190	230	12.0	1.9	5000	500
AS5-6LF			13.6	6.4 - 9.5					5000	500
AS6-3LF	3/16 4.8	#11 4.9	9.5	3.2 - 4.8	260	320	16.0	2.3	5000	250
AS6-4LF			11.1	4.8 - 6.4					5000	250
AS6-6LF			14.3	7.9 - 9.5					2500	250
AS6-8LF			17.5	11.1 - 12.7					2500	250
AS6-10LF			20.7	12.7 - 15.9					2000	200
AS6-12LF			23.8	15.9 - 19.0					2000	200
AS6-16LF			30.2	22.2 - 25.4					2000	100

ALUMINIUM RIVETS 120° COUNTERSUNK ASC ALUMINIUM RIVET, STEEL MANDREL

Material: Body: Aluminium Alloy 5050

Mandrel: Carbon Steel

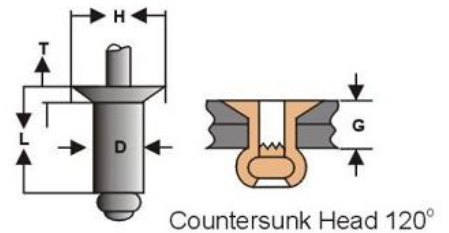

Countersunk Head 120°

COUNTERSUNK RIVETS are for applications where a flush appearance is required.

RIVET CODE	RIVET DIA D INCH MM	DRILL SIZE	RIVET LENGTH MAX MM	GRIP RANGE G	STANDARD STRENGTH		HEAD DIAMETER H (mm)	HEAD THICKNESS T (mm)	BULK QTY	BOX QTY
					LBS (min) SHEAR	TENSILE				
ASC4-3	1/8 3.2	#30 3.3	8.2	3.2 - 4.8	120	150	6.5	1.2	20000	1000
ASC4-4			9.9	4.8 - 6.4					20000	1000
ASC4-6			13.0	7.9 - 9.5					20000	1000
ASC4-8			16.2	9.5 - 12.7					10000	1000
ASC5-4	5/32 4.0	#20 4.1	10.5	4.8 - 6.4	190	230	8.0	1.5	10000	1000
ASC5-6			13.6	6.4 - 9.5					10000	500
ASC5-8			16.8	9.5 - 12.7					10000	500
ASC6-4	3/16 4.8	#11 4.9	11.1	4.8 - 6.4	260	320	9.5	1.6	5000	250
ASC6-6			14.3	7.9 - 9.5					5000	250
ASC6-8			17.5	11.1 - 12.7					5000	250
ASC6-10			20.7	12.7 - 15.9					5000	250
ASC6-16			30.2	15.9 - 25.4					2500	250

PRICES \$ PER 1000 BULK AND BOX PACKS



STEEL RIVETS SS


DOME HEAD - STEEL RIVET, STEEL MANDREL SPECIFICATION GRADE 30



Where joining steel to steel, where tensile or shear strength dictate a stronger rivet; metal cabinets, Shelving, etc. Primarily an interior rivet can be used as exterior rivet provided the rivet or application is painted or coated.

RIVET CODE			RIVET DIA D		DRILL SIZE	RIVET LENGTH MAX MM	STANDARD STRENGTH		GRIP RANGE		BULK	BOX
			INCH	MM			LBS (min) SHEAR	TENSILE	MM	QTY	QTY	
SS4-1			1/8	3.2	#30 3.3	5.15	260	310	0.8 - 1.6	10000	1000	
SS4-2						6.85			1.6 - 3.2	10000	1000	
SS4-3						8.35			3.2 - 4.8	10000	1000	
SS4-4						9.90			4.8 - 6.4	10000	1000	
SS4-5						11.55			6.4 - 7.9	10000	1000	
SS4-6						13.45			7.9 - 9.5	10000	1000	
SS4-8						16.85			9.5 - 12.7	10000	1000	
SS4-10						20.25			12.7 - 15.9	10000	1000	
SS5-2			5/32	4.0	#20 4.1	7.45	370	470	1.6 - 3.2	10000	1000	
SS5-3						9.05			3.2 - 4.8	10000	1000	
SS5-4						10.55			4.8 - 6.4	10000	1000	
SS5-5						12.05			6.4 - 7.9	10000	1000	
SS5-6						13.75			7.9 - 9.5	10000	500	
SS5-8						16.80			9.5 - 12.7	10000	500	
SS6-1			3/16	4.8	#11 4.9	6.45	540	680	1.6 - 3.2	5000	500	
SS6-2						8.05			1.6 - 3.2	5000	500	
SS6-3						9.65			3.2 - 4.8	5000	500	
SS6-4						11.25			4.8 - 6.4	5000	500	
SS6-5						12.85			6.4 - 7.9	5000	500	
SS6-6						14.45			7.9 - 9.5	5000	500	
SS6-8						17.55			9.5 - 12.7	5000	500	
SS6-10						21.45			12.7 - 15.9	5000	250	
SS6-12						22.65			15.9 - 19.0	5000	250	
SS6-16						30.20			19.0 - 25.4	2000	250	
SB8-4			1/4	6.4	6.5	12.60	1140	1550	1.6 - 6.4	2500	250	
SB8-6						15.80			6.4 - 9.5	2500	250	
SB8-8						19.00			9.5 - 12.7	2500	200	
SB8-12						25.30			15.9 - 19.0	2500	250	
SB8-16						31.50			19.0 - 25.4	2000	100	

LARGE FLANGE - STEEL RIVET, STEEL MANDREL SPECIFICATION GRADE 30




RIVET CODE			RIVET DIA D		DRILL SIZE	RIVET L LENGTH MAX MM	GRIP RANGE G	STANDARD STRENGTH		HEAD DIAMETER	HEAD THICKNESS	BULK	BOX
			INCH	MM				LBS (min) SHEAR	TENSILE	H (mm)	T (mm)	QTY	QTY
SBL4-4			1/8	3.2	#30 3.3	10.2	4.9 - 6.4	305	410	9.53	1.65	10000	1000
SBL6-4			3/16	4.8	#11 4.9	11.5	1.6 - 6.4	610	870	15.88	2.28	5000	250
SBL6-6						14.6	6.5 - 9.5					5000	250
SBL6-8						17.8	9.6 - 12.7					2000	100
SBL6-12						24.2	16.0 - 19.1					2000	100

PRICES \$ PER 1000 BULK AND BOX PACKS



ALL STAINLESS STEEL SSB-S
BUTTONHEAD - STAINLESS STEEL RIVET, STAINLESS STEEL MANDREL
SPECIFICATION GRADE 304





Domed Head

Excellent corrosion resistance, non staining. For food and marine industries and lifetime applications.



RIVET CODE			RIVET DIA D		DRILL SIZE	RIVET L LENGTH MAX MM	GRIP RANGE G	STANDARD STRENGTH		HEAD DIAMETER H (mm)	HEAD THICKNESS T (mm)	BULK QTY	BOX QTY
			INCH	MM				LBS (min)	SHEAR TENSILE				
SSB4-2S			1/8	3.2	#30 3.3	6.7	1.6 - 3.2	420	530	6.5	1.0	20000	1000
SSB4-3S						8.2	3.2 - 4.8					20000	1000
SSB4-4S						9.9	4.8 - 6.4					20000	1000
SSB4-6S						13.0	6.4 - 9.5					10000	1000
SSB4-8S						16.2	9.5 - 12.7					10000	1000
SSB5-2S			5/32	4.0	#20 4.1	7.3	1.6 - 3.2	650	820	8.0	1.2	10000	1000
SSB5-4S						10.5	3.2 - 6.4					10000	1000
SSB5-6S						13.6	6.4 - 9.5					5000	500
SSB6-2S			3/16	4.8	#11 4.9	8.0	1.6 - 3.2	950	1200	9.5	1.5	5000	500
SSB6-4S						11.1	3.2 - 6.4					5000	500
SSB6-6S						14.3	6.4 - 9.5					5000	500
SSB6-8S						17.5	9.5 - 12.7					5000	500
SSB6-10S						20.7	12.7 - 15.9					5000	250
SSB6-12S						23.8	15.9 - 19.1					5000	250
SSB8-4S			1/4	6.4	6.5	12.4	1.6 - 6.4	1700	2100	13.0	2.2	2500	250
SSB8-8S						18.7	6.4 - 12.7					2500	250
SSB8-12S						25.1	12.7 - 19.1					2500	250

ALL STAINLESS STEEL SSBL-S
LARGE FLANGE



SSBL4-4S			1/8	3.2	#30 3.3	10.2	4.8 - 6.4	420	530	9.6	1.6	10000	500
SSBL6-4S			3/16	4.8	#11 4.9	11.4	4.8 - 6.4	950	1200	16.0	2.3	5000	250
SSBL6-6S						14.6	7.9 - 9.5					5000	250
SSBL6-12S						24.1	16.0 - 19.1					2000	100

ALL STAINLESS STEEL SSC-S
COUNTERSUNK



SSC4-3S			1/8	3.2	#30 3.3	8.4	3.2 - 4.8	420	530	6.5	1.0	10000	1000
SSC5-4S			5/32	4.0	#20 4.1	10.6	3.2 - 6.4	650	820	8.0	1.2	5000	250
SSC6-4S			3/16	4.8	#11 4.9	11.2	3.2 - 6.4	1150	1300	9.5	1.5	5000	250
SSC6-6S						14.5	6.4 - 9.5					5000	250

PRICES \$ PER 1000 BULK AND BOX PACKS



NICKEL/COPPER ALLOY RIVETS MB
BUTTONHEAD - NICKEL/COPPER ALLOY RIVET, STEEL MANDREL
SPECIFICATION 400



This material gives excellent corrosion resistance for plumbing applications
 With increased shear and tensile strength it is one of the strongest rivets in the product range.

RIVET CODE	OTHER CODE	RIVET DIA		DRILL SIZE		RIVET LENGTH MAX MM	TYPICAL ULTIMATE STRENGTH (LBS)		GRIP RANGE		BULK	BOX
		INCH	MM				SHEAR	TENSILE	MM	QTY	QTY	
MB4-2	73MS4-2	1/8	3.2	#30	3.3	6.85	270	380	1.6 - 3.2	10000	1000	
MB4-3	73MS4-3					8.35			3.2 - 4.8	10000	1000	
MB4-4	73MS4-4					9.95			4.8 - 6.4	10000	1000	
MB4-6	73MS4-6					13.45			6.4 - 9.5	10000	1000	
MB5-2	73MS5-2	5/32	4.0	#20	4.1	7.45	760	870	1.6 - 3.2	10000	500	
MB5-4	73MS5-4					10.55			3.2 - 6.4	10000	500	
MB5-5	73MS5-5					12.05			6.4 - 7.9	10000	500	
MB5-6	73MS5-6					13.75			7.9 - 9.5	5000	500	
MB6-2	73MS6-2	3/16	4.8	#11	4.9	8.05	900	1100	1.6 - 3.2	5000	500	
MB6-3	73MS6-3					9.65			3.2 - 4.8	5000	500	
MB6-4	73MS6-4					11.25			4.8 - 6.4	5000	500	
MB6-5	73MS6-5					12.85			6.4 - 7.9	5000	500	
MB6-6	73MS6-6					14.45			7.9 - 9.5	5000	500	
MB6-8	73MS6-8					17.55			9.5 - 12.7	5000	500	
MB6-10	73MS6-10					21.45			12.7 - 15.9	2500	250	
MB8-4	TLPD850	1/4	6.4		6.5	13.00	1200	1500	Max 7.6	1500	100	
MB8-8	TLPD870					18.00			7.6 - 12.7	1500	100	
120° COUNTERSUNK												
MC4-2	72MS4-2	1/8	3.2	#30	3.3	6.1	270	380	1.6 - 3.2	10000	1000	
MC4-4	72MS4-4					9.3			3.2 - 6.4	10000	1000	
MC4-6	72MS4-6					13.5			6.4 - 9.5	10000	1000	
MC5-4	72MS5-4	5/32	4.0	#20	4.1	10.0	760	870	3.2 - 6.4	10000	1000	
MC6-2	72MS6-2	3/16	4.8	#11	4.9	8.0	900	1100	1.6 - 3.2	5000	500	
MC6-4	72MS6-4					11.5			3.2 - 6.4	5000	500	
MC6-6	72MS6-6					14.7			7.9 - 9.5	5000	500	
MC8-4	TLPK850		6.4		6.5	12.7	1200	1500	1.6 - 6.4	2000	200	

COPPER RIVETS
BUTTON HEAD - COPPER RIVET, STEEL MANDREL
SPECIFICATION 110



Good corrosion resistance, mainly used in plumbing applications and for decorative purposes.

RIVET CODE	OTHER CODE	RIVET DIA		DRILL SIZE		RIVET LENGTH MAX MM	TYPICAL ULTIMATE STRENGTH (LBS)		GRIP RANGE		BULK	BOX
		INCH	MM				SHEAR	TENSILE	MM	QTY	QTY	
CB4-2		1/8	3.2	#30	3.3	6.0	181	227	1.6 - 3.2	10000	1000	
CB4-4						10.0			3.2 - 6.4	10000	1000	


PRICES \$ PER 1000 BULK AND BOX PACKS



ALL ALUMINIUM RIVETS

BUTTONHEAD - ALUMINIUM RIVET, ALUMINIUM MANDREL SPECIFICATION 5052

Used in applications when the finished product must use only aluminium components
Joining plastic to thin aluminium sheet (joining soft to thin materials).




Domed Head

RIVET CODE	RIVET DIA D	DRILL SIZE	RIVET L LENGTH	GRIP RANGE	STANDARD STRENGTH		HEAD DIAMETER	HEAD THICKNESS	BULK QTY	BOX QTY
					LBS (min)	TENSILE				
	INCH MM		MAX MM	G			H (mm)	T (mm)		
AA4-2	1/8 3.2	#30 3.3	6.7	1.6 - 3.2	120	150	6.5	1.2	20000	1000
AA4-3			8.2	3.2 - 4.8					20000	1000
AA4-4			9.9	4.8 - 6.4					20000	1000
AA4-6			13.0	8.0 - 9.5					20000	1000
AA5-2	5/32 4.0	#20 4.1	7.3	0.8 - 3.2	190	230	8.0	1.5	10000	1000
AA5-4			10.5	4.8 - 6.4					10000	1000
AA5-6			13.6	8.0 - 9.6					10000	500
AA6-2	3/16 4.8	#11 4.9	8.0	0.8 - 3.2	260	320	9.5	1.6	10000	500
AA6-4			11.1	4.8 - 6.4					10000	500
AA6-6			14.3	8.0 - 9.6					5000	500
AA6-8			17.5	9.6 - 12.7					5000	500
AA6-12			23.8	15.9 - 19.1					5000	250

PEEL ALUMINIUM RIVETS

BUTTONHEAD - ALUMINIUM RIVET, STEEL STEM ASP- (SPECIFICATION)

Used to fasten to softer materials, wood, plastic widely used in caravans, trailers and furniture.




RIVET CODE	RIVET DIA D	DRILL SIZE	RIVET L LENGTH	GRIP G	STANDARD STRENGTH		HEAD DIAMETER	HEAD THICKNESS	BULK QTY	BOX QTY
					LBS (min)	TENSILE				
	INCH MM		MAX MM	MAX MM			H (mm)	T (mm)		
ASP4-4	1/8 3.2	9/64	12.0	6.40	170	220	6.5	1.2	10000	1000
ASP4-6			15.0	9.50					10000	1000
ASP5-6	5/32 4.0	11/64	16.0	9.50	260	350	8.0	1.5	10000	500
ASP6-5	3/16 4.8	13/64	14.0	7.90	380	500	9.5	1.6	5000	500
ASP6-6			16.0	9.50					5000	500
ASP6-8			19.0	12.70					5000	500
ASP6-10			22.0	15.90					5000	500
ASP6-12			25.0	19.10					5000	500
ASP6-16			32.0	25.40					2500	250

LSR - LOAD SPREAD RIVETS

ACD BUTTONHEAD - ALUMINIUM RIVET, ALUMINIUM MANDREL

During installation the body of the rivet folds into 3 separate legs which create a large bearing surface and distributes the clamp force allowing soft or thin materials to be joined without damage.


Material: Body: Aluminium Alloy (2.5Mg) AA5052
Mandrel: Aluminium Alloy (2.5Mg) AA5052

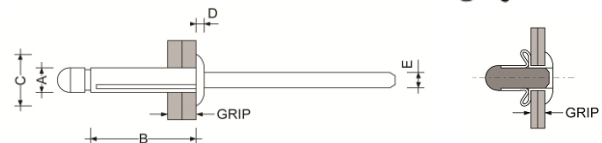

RIVET CODE	RIVET DIA	DRILL SIZE	RIVET LENGTH	GRIP RANGE	STANDARD STRENGTH		HEAD DIAMETER	HEAD THICKNESS	BULK QTY	BOX QTY
					N	TENSILE				
	INCH MM		B MM	MM			C (mm)	D (mm)		
ACD508	5/32 4.0	#20 4.1	18.8	1.0 - 7.0	600	1000	8.0	1.4	4000	1000
ACD612	3/16 4.8	#11 4.9	20.5	1.0 - 9.0	900	1200	9.8	1.8		1000
ACD616			24.0	4.0 - 12.0	900	1200	9.8	1.8	2500	1000




CLOSED END RIVETS ASCE (SEALED)
ALUMINIUM RIVET, STEEL MANDREL
SPECIFICATION IFI-126/GRADE 19



Closed end blind rivets are designed to enclose the mandrel head after fastening and are suitable for many applications which ask for waterproof. Provide a high shear, vibration resistance and pressure tight.

RIVET CODE	RIVET DIA INCH	RIVET DIA MM	DRILL SIZE	DRILL SIZE MM	RIVET L LENGTH MAX MM	GRIP RANGE G	STANDARD STRENGTH		HEAD DIAMETER H (mm)	HEAD THICKNESS T (mm)	BULK QTY	BOX QTY
							LBS (min) SHEAR	TENSILE				
ASCE4-1	1/8	3.2	#30	3.3	7.5	0.8 - 1.6	240	280	6.5	1.3	20000	1000
ASCE4-2					9.1	1.6 - 3.2					20000	1000
ASCE4-3					10.7	3.2 - 4.8					20000	1000
ASCE4-4					12.3	4.8 - 6.4					10000	1000
ASCE4-5					13.9	6.4 - 7.9					10000	1000
ASCE4-6					15.5	7.9 - 9.5					10000	1000
ASCE5-2	5/32	4.0	#20	4.1	9.5	1.6 - 3.2	350	480	8.0	1.7	10000	1000
ASCE5-4					12.7	3.2 - 6.4					10000	500
ASCE5-5					14.3	6.4 - 7.9					10000	500
ASCE6-2	3/16	4.8	#11	4.9	10.3	1.6 - 3.2	500	690	9.5	2.0	10000	500
ASCE6-3					11.9	3.2 - 4.8					10000	500
ASCE6-4					13.5	4.8 - 6.4					5000	500
ASCE6-5					15.0	6.4 - 7.9					5000	500
ASCE6-6					16.7	7.9 - 9.5					5000	500
ASCE6-8					19.8	9.5 - 12.7					5000	500
ASCE6-10					23.0	12.7 - 15.9					5000	250
ASCE6-12					25.1	15.9 - 19.1					5000	250



CLOSED END RIVETS COUNTERSUNK HEAD
5056 ALUMINIUM RIVET, STEEL STEM



ASCEC4-2				1/8	3.2	#30	3.3	1.6 - 3.2	240	280	6.5	1.6 - 3.2	20000	1000
ASCEC4-3								3.2 - 4.8				3.2 - 4.8	20000	1000
ASCEC6-4				3/16	4.8	#11	4.9	3.2 - 6.4	500	690	9.5	3.2 - 6.4	5000	500
ASCEC6-6								6.4 - 9.5				6.4 - 9.5	5000	500

WATERPROOF RIVETS SSWP (SEALED)
STAINLESS STEEL RIVET, STAINLESS STEEL MANDREL
SPECIFICATION 304

Excellent corrosion resistance, high strength and high weather-proofing capabilities. ie food and marine industries.



RIVET CODE	RIVET DIA INCH	RIVET DIA MM	DRILL SIZE	DRILL SIZE MM	RIVET L LENGTH MAX MM	GRIP RANGE G	STANDARD STRENGTH		HEAD DIAMETER H (mm)	HEAD THICKNESS T (mm)	BULK QTY	BOX QTY
							LBS (min) SHEAR	TENSILE				
SSWP4-3S	1/8	3.2	#30	3.3	9.9	3.2 - 4.8	450	495	6.0	1.3	10000	1000
SSWP4-4S					11.5	4.8 - 6.4					10000	1000
SSWP4-6S					14.7	6.4 - 9.5					10000	1000
SSWP5-4S	5/32	4.0	#20	4.1	11.9	4.82 - 6.4	675	786	8.0	1.7	5000	500
SSWP6-4S	3/16	4.8	#11	4.9	12.7	4.8 - 6.4	900	990	9.5	2.0	5000	500
SSWP6-6S					15.9	6.4 - 9.5					5000	500

PRICES \$ PER 1000 BULK AND BOX PACKS